

DATE: May 21, 2021

INVITATION TO TENDER NO. PS20210298
CONTRACTOR FOR TEMPLETON TRACK RENEWAL

ADDENDUM NO. 3

RE: ADDED - ADDITIONAL CLARIFICATIONS ON DRAWINGS

- Addendum #3 - AD3-01
- Addendum #3 - AD3-02

See attached.


This addendum must be completed, and attached to your Application form.

NAME OF VENDOR

SIGNATURE OF AUTHORIZED SIGNATORY

DATE

Jason Lo
Contracting Specialist

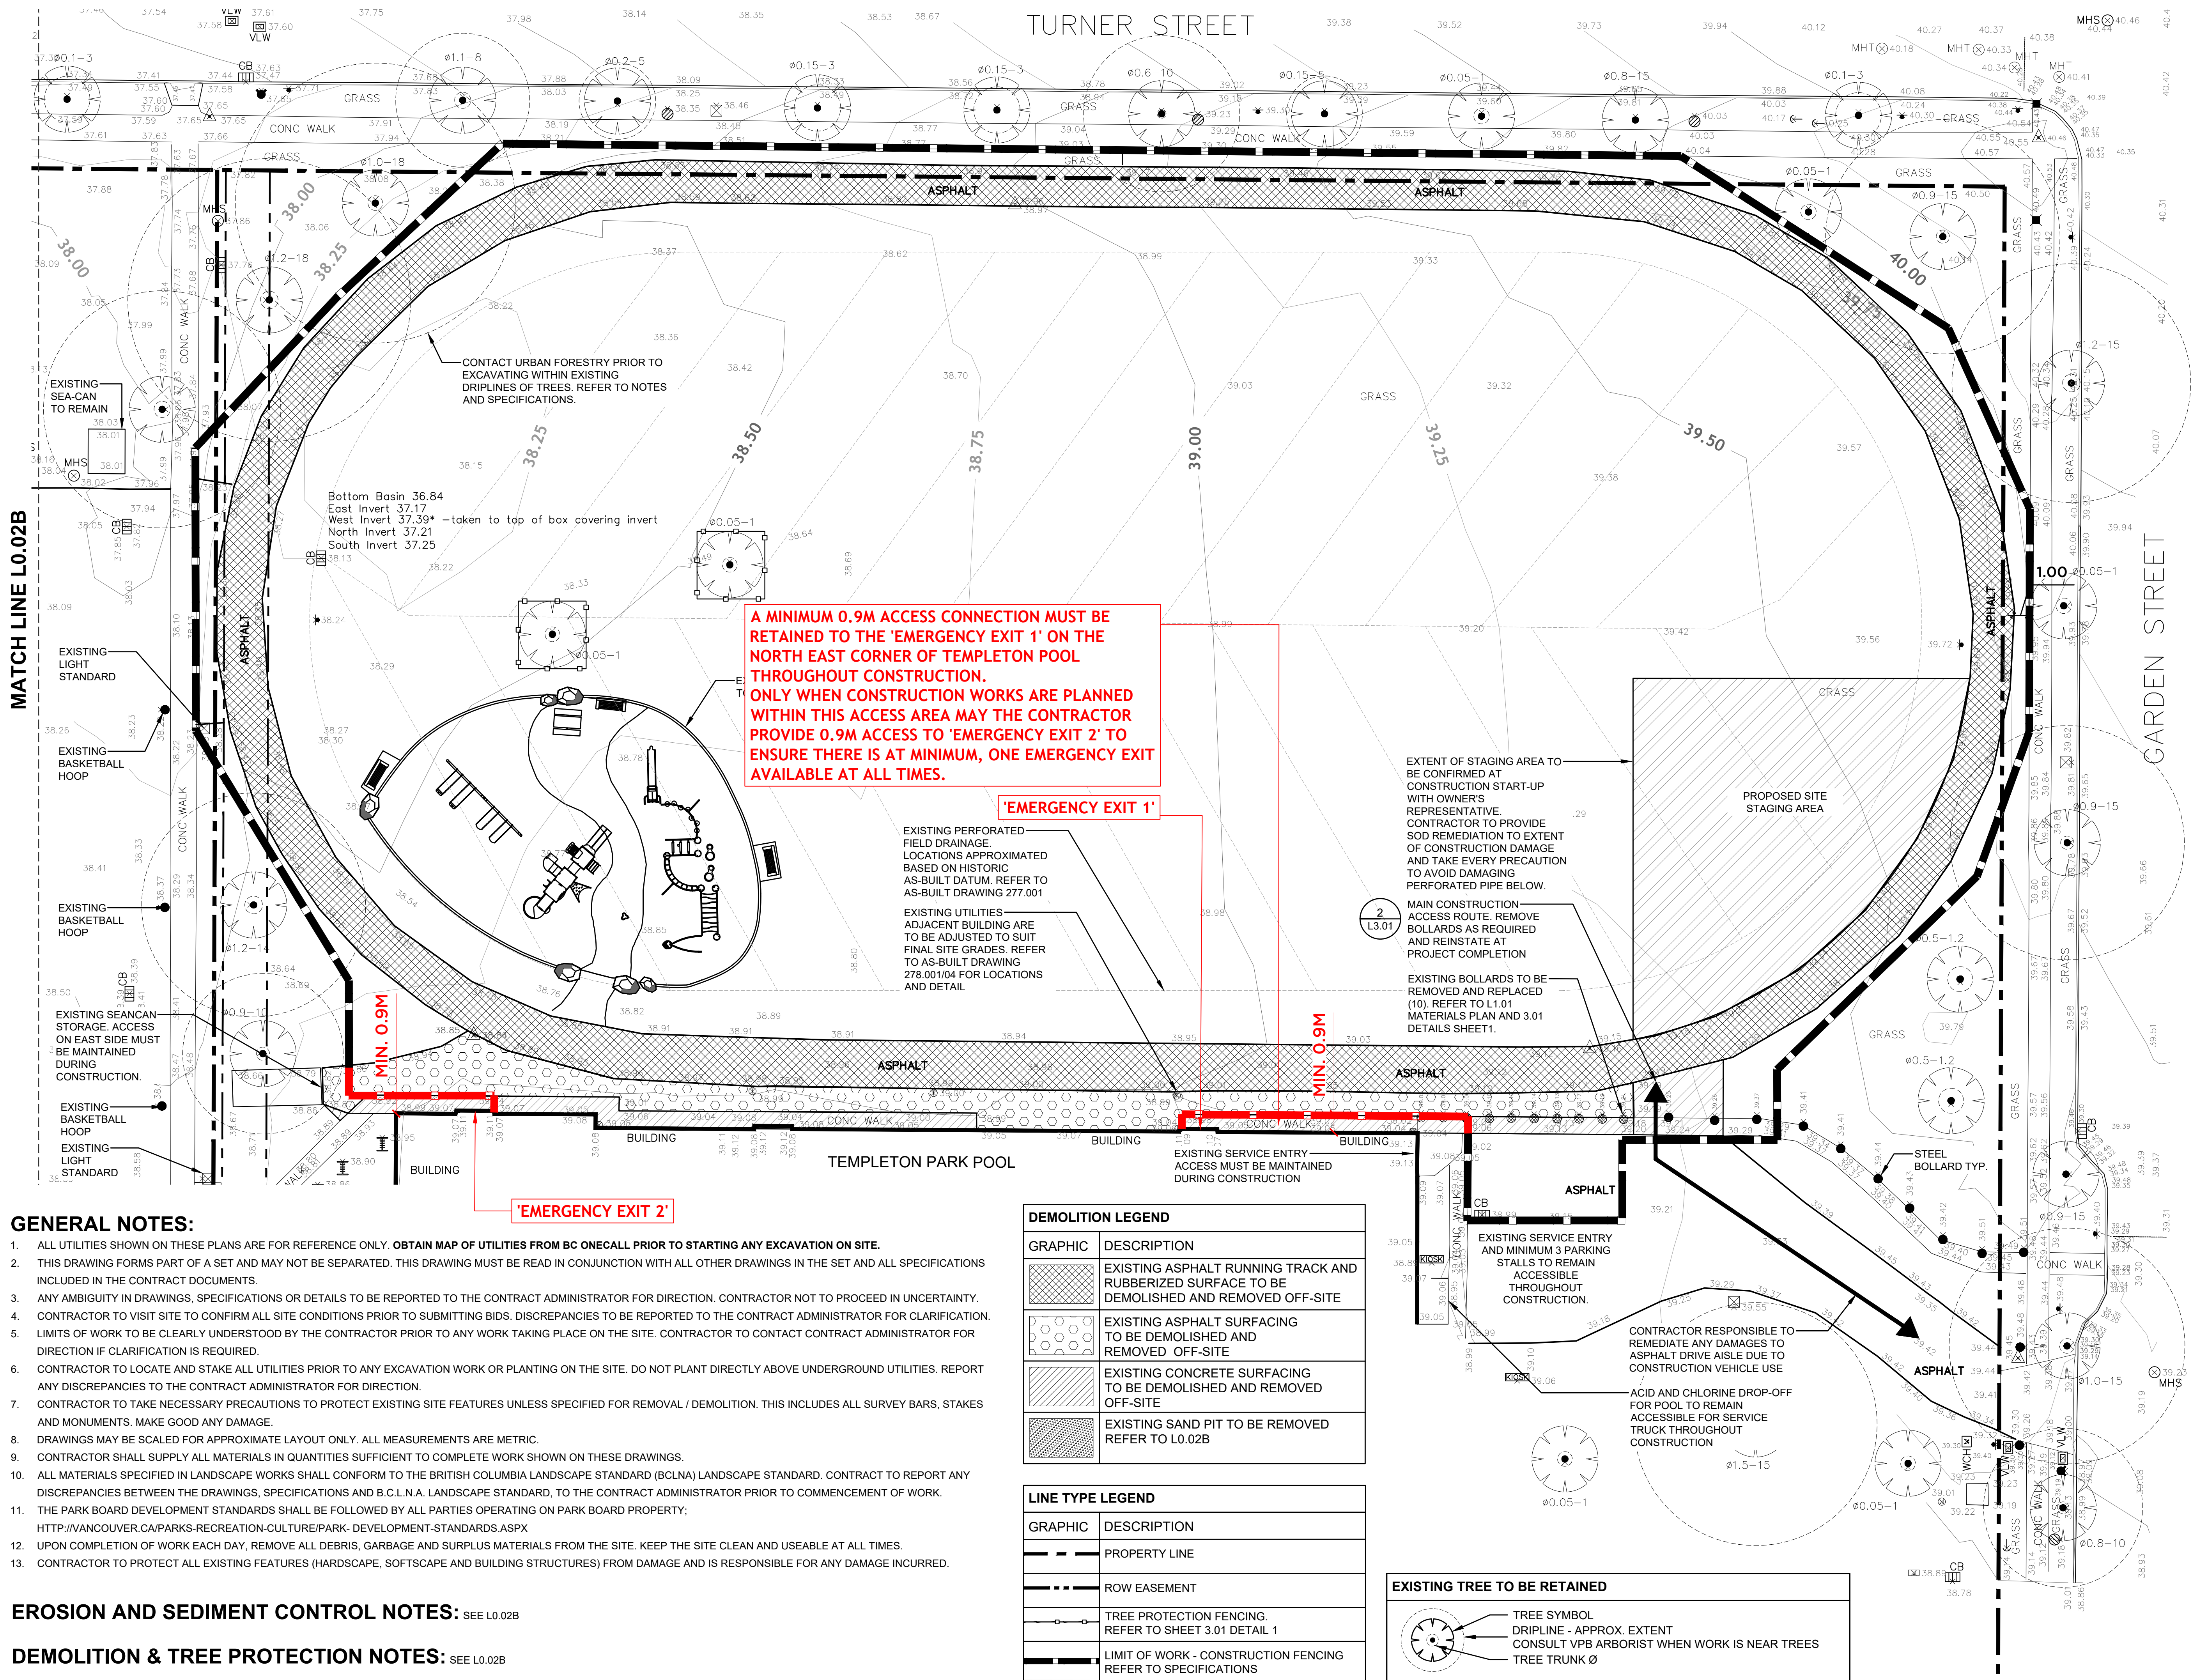

GENERAL NOTES:

- ALL UTILITIES SHOWN ON THESE PLANS ARE FOR REFERENCE ONLY. OBTAIN MAP OF UTILITIES FROM BC ONECALL PRIOR TO STARTING ANY EXCAVATION ON SITE.
- THIS DRAWING FORMS PART OF A SET AND MAY NOT BE SEPARATED. THIS DRAWING MUST BE READ IN CONJUNCTION WITH ALL OTHER DRAWINGS IN THE SET AND ALL SPECIFICATIONS INCLUDED IN THE CONTRACT DOCUMENTS.
- ANY AMBIGUITY IN DRAWINGS, SPECIFICATIONS OR DETAILS TO BE REPORTED TO THE CONTRACT ADMINISTRATOR FOR DIRECTION. CONTRACTOR NOT TO PROCEED IN UNCERTAINTY.
- CONTRACTOR TO VISIT SITE TO CONFIRM ALL SITE CONDITIONS PRIOR TO SUBMITTING BIDS. DISCREPANCIES TO BE REPORTED TO THE CONTRACT ADMINISTRATOR FOR CLARIFICATION.
- LIMITS OF WORK TO BE CLEARLY UNDERSTOOD BY THE CONTRACTOR PRIOR TO ANY WORK TAKING PLACE ON THE SITE. CONTRACTOR TO CONTACT CONTRACT ADMINISTRATOR FOR DIRECTION IF CLARIFICATION IS REQUIRED.
- CONTRACTOR TO LOCATE AND STAKE ALL UTILITIES PRIOR TO ANY EXCAVATION WORK OR PLANTING ON THE SITE. DO NOT PLANT DIRECTLY ABOVE UNDERGROUND UTILITIES. REPORT ANY DISCREPANCIES TO THE CONTRACT ADMINISTRATOR FOR DIRECTION.
- CONTRACTOR TO TAKE NECESSARY PRECAUTIONS TO PROTECT EXISTING SITE FEATURES UNLESS SPECIFIED FOR REMOVAL / DEMOLITION. THIS INCLUDES ALL SURVEY BARS, STAKES AND MONUMENTS. MAKE GOOD ANY DAMAGE.
- DRAWINGS MAY BE SCALED FOR APPROXIMATE LAYOUT ONLY. ALL MEASUREMENTS ARE METRIC.
- CONTRACTOR SHALL SUPPLY ALL MATERIALS IN QUANTITIES SUFFICIENT TO COMPLETE WORK SHOWN ON THESE DRAWINGS.
- ALL MATERIALS SPECIFIED IN LANDSCAPE WORKS SHALL CONFORM TO THE BRITISH COLUMBIA LANDSCAPE STANDARD (BCLNA) LANDSCAPE STANDARD. CONTRACT TO REPORT ANY DISCREPANCIES BETWEEN THE DRAWINGS, SPECIFICATIONS AND B.C.L.N.A. LANDSCAPE STANDARD, TO THE CONTRACT ADMINISTRATOR PRIOR TO COMMENCEMENT OF WORK.
- THE PARK BOARD DEVELOPMENT STANDARDS SHALL BE FOLLOWED BY ALL PARTIES OPERATING ON PARK BOARD PROPERTY;
[HTTP://VANCOUVER.CA/PARKS-RECREATION-CULTURE/PARK-DEVELOPMENT-STANDARDS.ASPX](http://VANCOUVER.CA/PARKS-RECREATION-CULTURE/PARK-DEVELOPMENT-STANDARDS.ASPX)
- UPON COMPLETION OF WORK EACH DAY, REMOVE ALL DEBRIS, GARBAGE AND SURPLUS MATERIALS FROM THE SITE. KEEP THE SITE CLEAN AND USEABLE AT ALL TIMES.
- CONTRACTOR TO PROTECT ALL EXISTING FEATURES (HARDSCAPE, SOFTSCAPE AND BUILDING STRUCTURES) FROM DAMAGE AND IS RESPONSIBLE FOR ANY DAMAGE INCURRED.

EROSION AND SEDIMENT CONTROL NOTES: SEE L0.02B

DEMOLITION & TREE PROTECTION NOTES: SEE L0.02B

DEMOLITION LEGEND	
GRAPHIC	DESCRIPTION
	EXISTING ASPHALT RUNNING TRACK AND RUBBERIZED SURFACE TO BE DEMOLISHED AND REMOVED OFF-SITE
	EXISTING ASPHALT SURFACING TO BE DEMOLISHED AND REMOVED OFF-SITE
	EXISTING CONCRETE SURFACING TO BE DEMOLISHED AND REMOVED OFF-SITE
	EXISTING SAND PIT TO BE REMOVED REFER TO L0.02B

LINE TYPE LEGEND	
GRAPHIC	DESCRIPTION
	PROPERTY LINE
	ROW EASEMENT
	TREE PROTECTION FENCING. REFER TO SHEET 3.01 DETAIL 1
	LIMIT OF WORK - CONSTRUCTION FENCING REFER TO SPECIFICATIONS

EXISTING TREE TO BE RETAINED

TREE SYMBOL
DRIPLINE - APPROX. EXTENT CONSULT VPB ARBORIST WHEN WORK IS NEAR TREES
TREE TRUNK Ø



COPYRIGHT OF THIS DRAWING IS OWNED BY THE CITY OF VANCOUVER BOARD OF PARKS AND RECREATION ("PARK BOARD"). THIS DRAWING MAY NOT BE PRODUCED IN WHOLE OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE PARK BOARD PLANNING DEPARTMENT ("STAFF"). THIS DRAWING MUST NOT BE SCALED. THE CONTRACTOR/CONSULTANT ("CONTRACTOR") RETAINED BY THE PARK BOARD TO CONDUCT THE WORK DEPICTED IN THIS DRAWING SHALL VERIFY ALL DIMENSIONS, DATUMS AND LEVELS PRIOR TO COMMENCEMENT OF WORK. THE CONTRACTOR SHALL REQUEST CLARIFICATION OF ANY ERRORS OR DISCREPANCIES AND SHALL NOTIFY STAFF OF ANY ERRORS OR OMISSIONS IN THIS DRAWING. FAILURE TO OBTAIN CLARIFICATION OR TO NOTIFY STAFF OF ERRORS OR OMISSIONS WILL RENDER THE CONTRACTOR RESPONSIBLE FOR ANY RESULTING IMPROPER WORK AND FOR THE COST OF ANY RECTIFICATION DUE TO SUCH IMPROPER WORK. VARIATIONS AND MODIFICATIONS TO THIS DRAWING AND/OR TO THE WORK SHOWN ON THIS DRAWING SHALL NOT BE CARRIED OUT WITHOUT THE PRIOR WRITTEN PERMISSION OF STAFF.


CONSULTANT OF RECORD

SEAL OR STAMP

ISSUED FOR	DATE	REV
50% REVIEW	NOV 10 2020	1
75% REVIEW	FEB 18 2021	2
90% REVIEW	APR 06 2021	3
100% REVIEW	APR 16 2021	4
TENDER	APR 30 2021	5

DRAWN BY: JM/CW CHECKED BY: AMB

SCALE IN METRES 1:200




PROJECT
TEMPLETON TRACK AND
LONG JUMP RENEWAL

DRAWING
DEMOLITION AND
TREE PROTECTION PLAN

SHEET

AD3-01

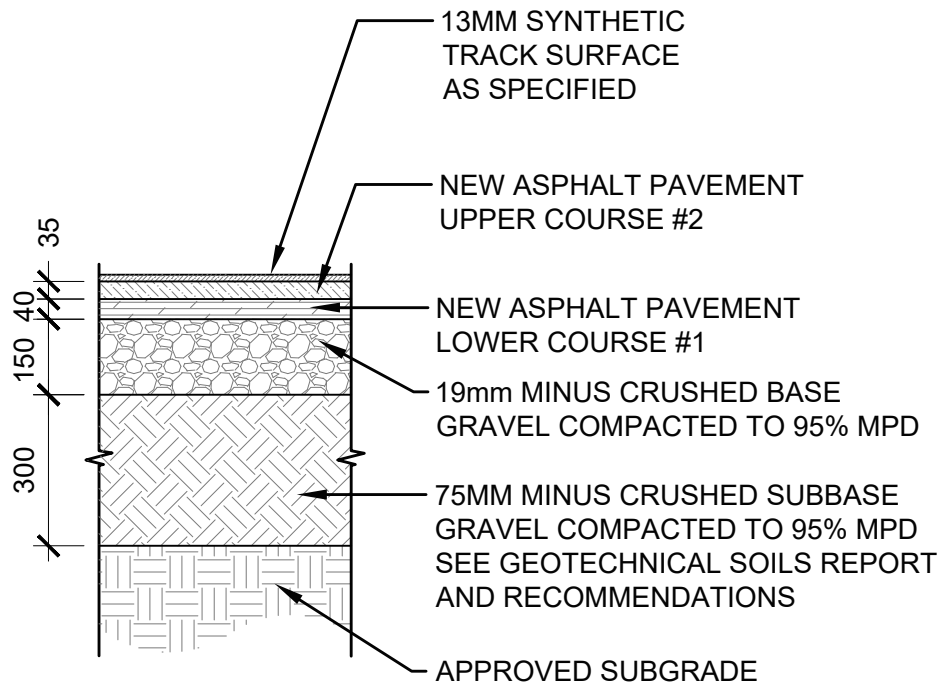

NOTES:

1. PRIOR TO INSTALLATION OF BASE GRAVELS A SIGNED FIELD MEMO BY GEOTECHNICAL ENGINEER IS REQUIRED CONFIRMING SUBGRADE HAS SUFFICIENT COMPACTION AND BEARING CAPACITY - REFER TO SPECIFICATIONS.



DRAWING
TYPICAL RUNNING TRACK AND
LONG JUMP RUN-IN PROFILE

DATE
MAY-19-2021

REV

SCALE
1:15

SHEET

AD3-02