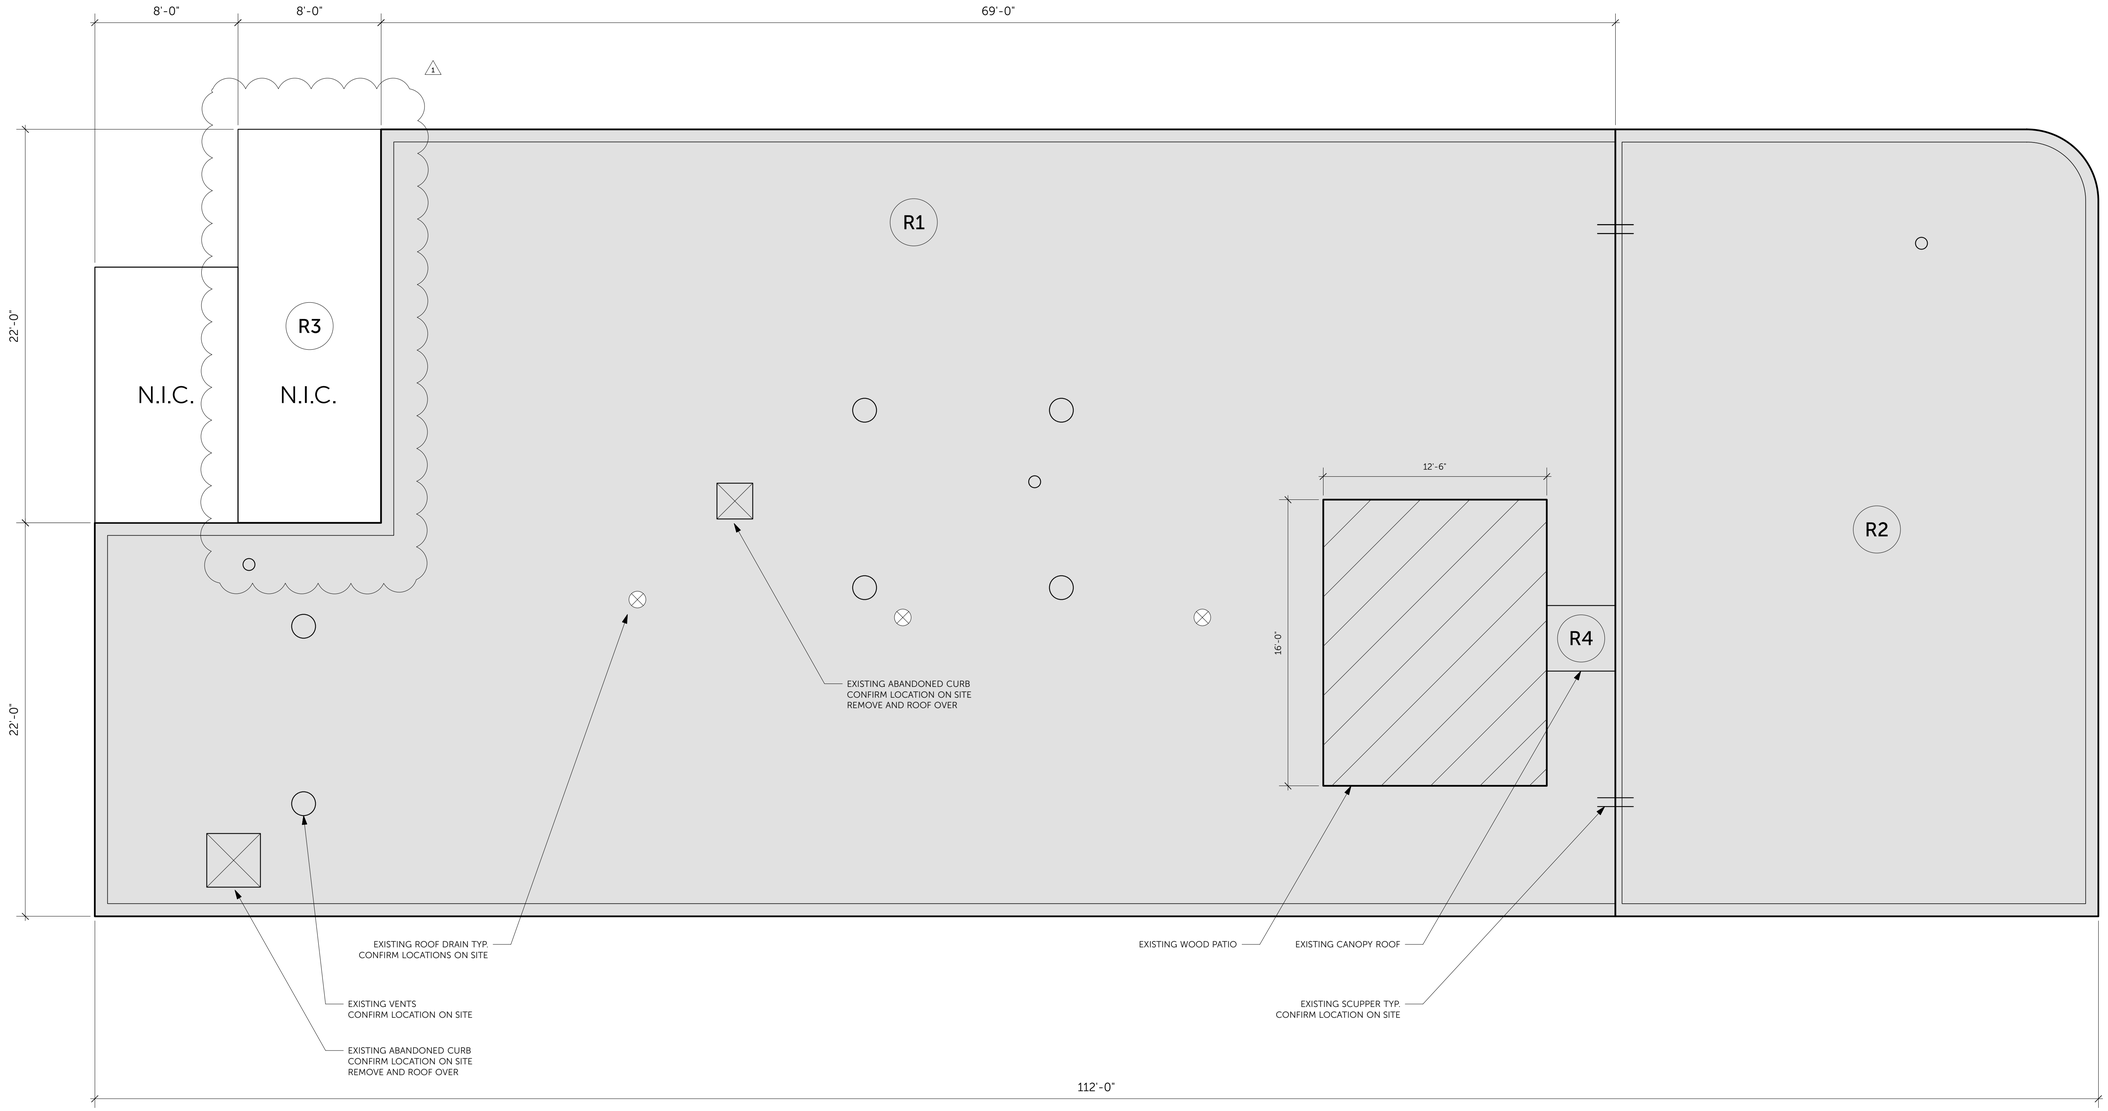

R1
EXISTING ROOF ASSEMBLY:
4-PLY ASPHALT & GRAVEL ON
2 LAYERS 1/2" FIBERBOARD ON
1" T&G WOOD DECK

R2
EXISTING ROOF ASSEMBLY:
4-PLY ASPHALT & GRAVEL ON
2 LAYERS 1/2" FIBERBOARD ON
SLOPED EPS INSULATION ON
1" T&G WOOD DECK

R3
EXISTING ROOF ASSEMBLY:
4-PLY TAR (COAL TAR PITCH) & GRAVEL ON
KRAFT PAPER UNDERLAY ON
1" T&G WOOD DECK

R4
EXISTING ROOF ASSEMBLY:
GRAVEL ON
EXISTING COLD APPLIED RUBBERIZED SYSTEM ON
EXISTING WOOD DECKING

R1 R2 R3 R4
NEW ROOF ASSEMBLY:
SBS GRANULATED CAP SHEET ON
SBS VENTED BASE SHEET ON
1/2" PROTECTION BOARD ON
NEW POLY ISO INSULATION ON
NEW TAPERED SLOPE PACKAGE ON
NEW VAPOUR BARRIER ON
1/4" MECH. FASTENED DENSDECK ON
EXISTING DECKING

LEGEND:

- EXISTING HATCH CURB OPENING
- EXISTING DRAIN
- AREA OF WORK
- EXISTING VENT
- EXISTING SCUPPER
- EXISTING WOOD DECK

EXISTING ROOF PLAN
SCALE 1/4" = 1'-0"

NOTE: FIELD VERIFY ALL MEASUREMENTS: DO NOT SCALE OFF DRAWINGS

REVISIONS:

1 APRIL 12, 2018
ADDENDUM #1

COV PROPERTIES

**1581-1585 W. 4TH AVE.,
VANCOUVER, BC**

McCUAIG & ASSOCIATES
ENGINEERING LTD.

#201 - 33 East 8th Avenue
Vancouver, BC, V5T 1R5
Phone: 604-255-0992
Fax: 604-255-1054

ONLY VALID
FOR CONSTRUCTION
WHEN SEALED AND SIGNED

SHEET TITLE:
EXISTING ROOF PLAN

SCALE:	**1/4" = 1'-0"**
DRAWN BY:	**GC**
DRAWN ON:	**APRIL 12, 2018**
CHECKED BY:	**AL/PC**
PROJECT #:	**20171104**
ISSUED FOR:	**ADDENDUM #1 ON APRIL 12, 2018**

A002-R1

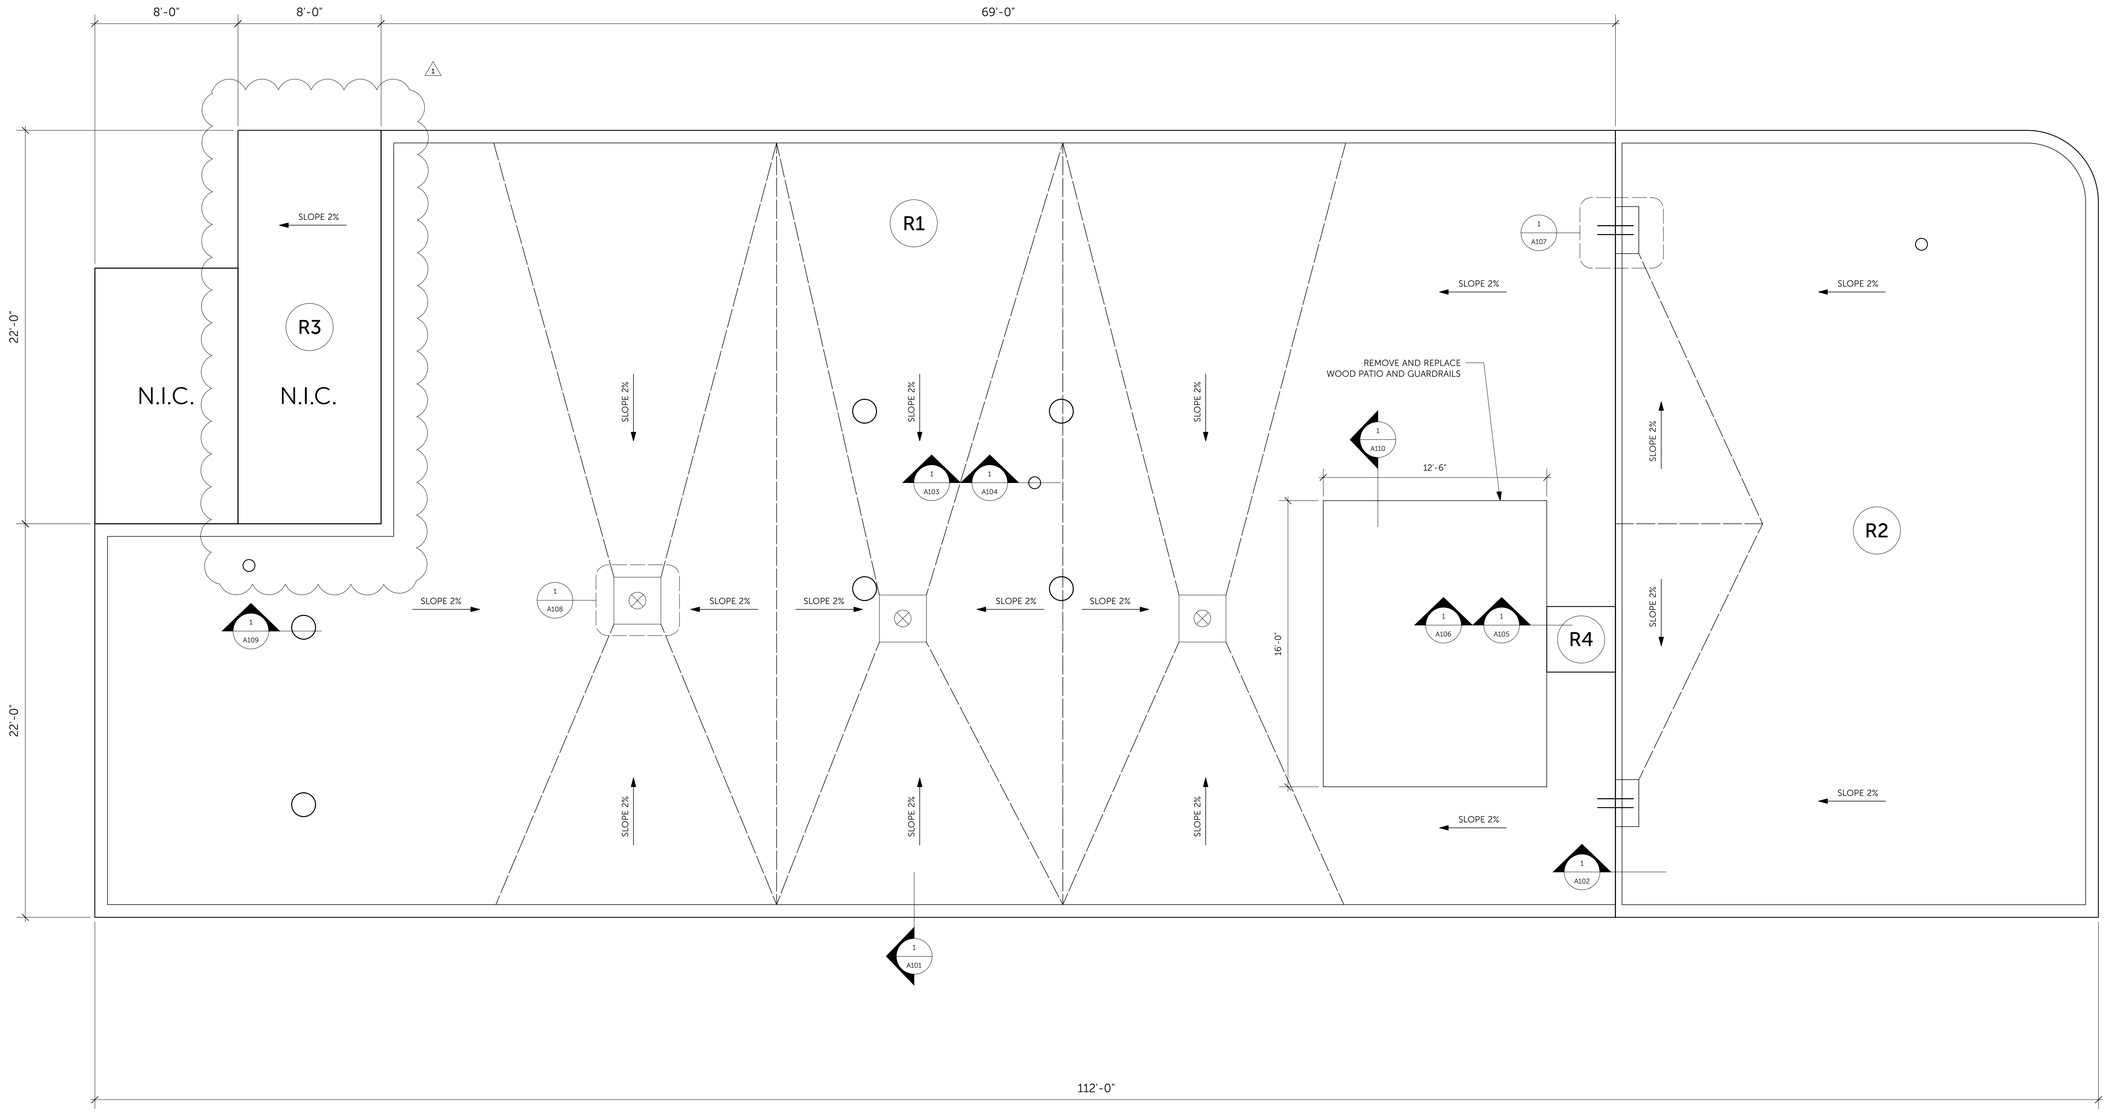

LEGEND:

- EXISTING HATCH CURB OPENING
- EXISTING DRAIN
- AREA OF WORK
- EXISTING VENT
- EXISTING SCUPPER
- EXISTING WOOD DECK

PROPOSED ROOF PLAN
SCALE 1/4" = 1'-0"

NOTE: FIELD VERIFY ALL MEASUREMENTS: DO NOT SCALE OFF DRAWINGS

REVISIONS:

1 APRIL 12, 2018
ADDENDUM #1

COV PROPERTIES

**1581-1585 W. 4TH AVE.,
VANCOUVER, BC**

McCUAIG & ASSOCIATES
ENGINEERING LTD.

#201 - 33 East 8th Avenue
Vancouver, BC, V5T 1R5
Phone: 604-255-0992
Fax: 604-255-1054

ONLY VALID
FOR CONSTRUCTION
WHEN SEALED AND SIGNED

SHEET TITLE:
PROPOSED ROOF PLAN

SCALE:	**1/4" = 1'-0"**
DRAWN BY:	**GC**
DRAWN ON:	**APRIL 12, 2018**
CHECKED BY:	**AL/PC**
PROJECT #:	**20171104**
ISSUED FOR:	**ADDENDUM #1 ON APRIL 12, 2018**

A003-R1